

# Warm White Rigid Bar LED Light Strip

## MRI Compatible




### Product Description

The Warm White LED Rigid Bar Light Strip is a non-ferrous high output linear light strip for indirect or direct view as an interior architectural design lighting package. Specially designed circuitry allows for modifying length in 3cm sections of three LED segments. The Warm White LED Rigid Bar Light Strip offers exceptionally cool operation for long LED lifetime and color stability. Contains no on-board electronics to interfere with MRI imaging. Certified to meet MRI vendor EMI requirements. MRI applications require EMI free emissions for specific frequency bands. All drive circuitry employs linear regulation and no pulse width modulation (PWM\*).

3-07-000015

### Performance Summary

Initial Delivered Lumens: 850 lm
Input Power: 11.6 watts
Limited Warranty: 3 years
Lifetime: Designed to last 50,000 hours
Dimming: Linear

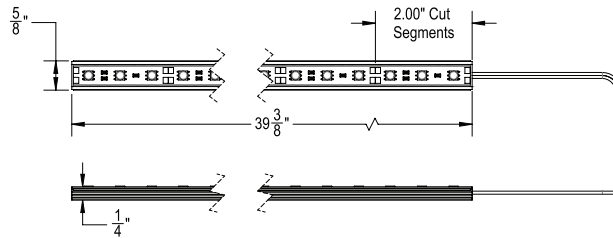

### Mechanical

	Minimum	Typical	Maximum	Units
Package	-	LED Strip	-	-
Electrical Connection	-	Low Voltage 4 Pin Connector	-	-
LED Type	-	5050	-	-
LED Count	-	60	-	per meter
Clips	-	3	-	per meter
Custom Length	-	Variable	39 3/8	in.
Fixture Weight	-	0.3	-	lbs

### Electrical

	Minimum	Typical	Maximum	Units
Input Voltage	-	12	-	Vdc
Input Current	-	0.97	-	A
Input Power	-	11.6	-	W
Wiring	-	Parallel only	-	-

### Compliance

	Minimum	Typical	Maximum	Units
IP	25	-	-	Dry Location
Regulatory	-	Listed	-	UL 2108 CSA C22.2#250.0
RoHS	-	Pending	-	2011/65/EU

### Environmental

	Minimum	Typical	Maximum	Units
Storage Temperature	-40	25	85	C
Operating Temperature	-20	25	35	C
Humidity	5	-	95	%
Lifespan	50000	-	-	Hours
Warranty	3	-	-	Years

### Installation Notes

- A PDC RF Filter is required for proper operation in the MRI suite
- A PDC Power Supply is required for proper operation in the MRI suite
- \*PWM is known to cause image artifacts, audible noise and light flicker



Intertek



700 Walnut Ridge Drive  
Hartland, WI 53029  
Phone: 262-367-7700  
Web: www.pdcbiz.com  
Email: pdcbiz@pdcbiz.com


© 2019 PDC Facilities, Inc. All rights reserved.  
For informational purposes only. Content is subject to change.

Date Revised: 2019.05.08

# Photometric Data and IES Distribution

Photometric				
	Minimum	Typical	Maximum	Units
Luminous Flux	-	850	-	lm
CCT	-	3100	-	k
CRI	72.9	-	-	-
Chromaticity (u')	-	0.244	-	-
Chromaticity (v')	-	0.519	-	-
Efficacy	-	73	-	lm/W

### Spectral Data Over Visible Wavelength

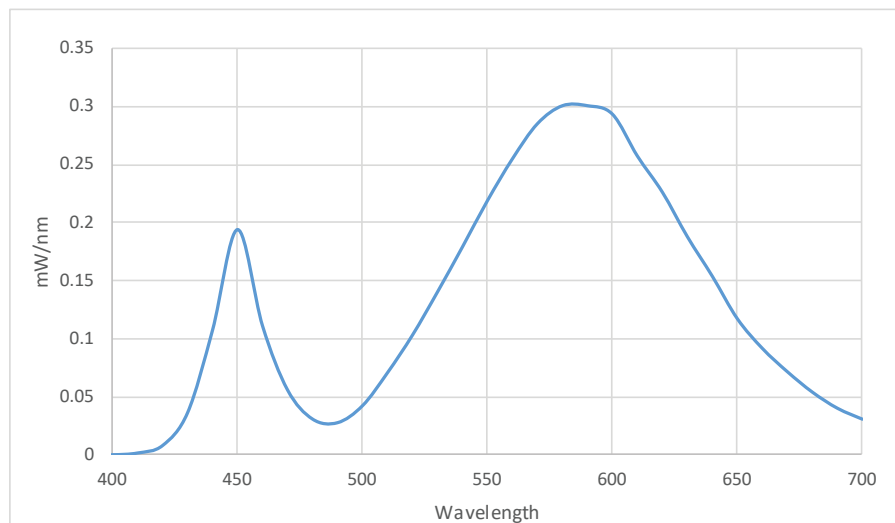

### Polar Plot

